

GENERAL GUIDE LINES

Septic systems should:

- Not be located within 6 ft (1.5 m) of a building or property boundary.
- Not be located near high traffic areas or subjected to excessive loads.
- Be accessible for ease of maintenance.
- Never use sharp objects around the tank to avoid puncturing the tank.
- Tank inspection port should not be buried to allow for inspection and maintenance

RECOMMENDATIONS:

- Do not flush non-biodegradable items (disposable diapers, condoms, feminine hygiene products, etc).
- Do not use any type of septic system additives or enzymes.

MAINTENANCE:

- Fatboy systems are designed to ensure easy access for cleaning. It is recommended that tanks are cleaned as necessary, with inspection every 12 to 18 months.
- Always refill Tanks and Digesters with water.
- Replace filters twice per year.



🏠 27-29 Don Miguel Road Extension
El Socorro Extension
El Socorro 280616 | Trinidad & Tobago



☎ +1 (868) 674-TANK (8265)
✉ info@rotoplastics.co.tt
🌐 www.rotoplastics.co.tt



FEATURES:

- ✓ Rotationally molded HDPE for super strength ensuring higher durability
- ✓ Its seamless design gives it a structural strength that resists deformation
- ✓ Lightweight compared to concrete septic tanks
- ✓ Designed for quick & easy transport & installation
- ✓ Environmentally safe
- ✓ Fully recyclable material.
- ✓ Non-corrosive
- ✓ Ideal for residential & commercial applications
- ✓ Single & double compartment options available
- ✓ Accessories: Risers & Filters available

SIZE	H	D	H	W	USERS
300 GAL	67.75 in	56.50 in	-	90 lbs	1-3 (max)
500 GAL	67.75 in	67.00 in	-	135 lbs	3-5 (max)

SIZE	L	W	H	W	USERS
750 GAL	87.63 in	51.25 in	67.38 in	400 lbs	8- 10 (max)



Leak proof



Resistant to Cracking.





Lightweight and Compact




Heavily ribbed for added rigidity and strength:




300 & 500 GAL

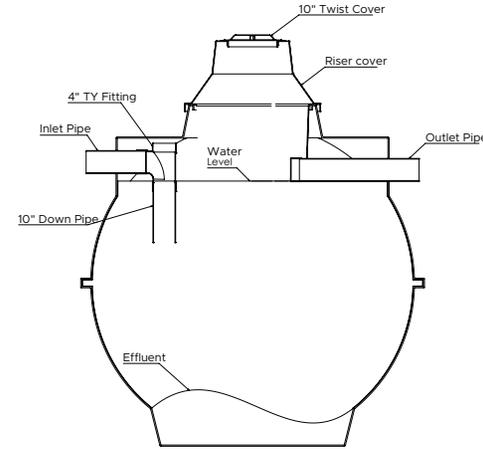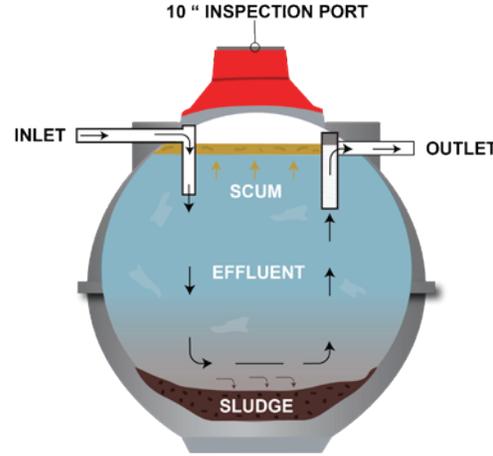

750 GAL

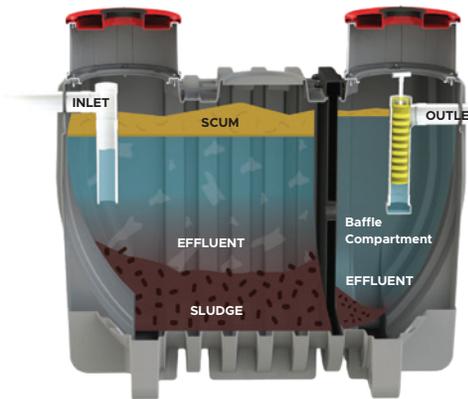

12" Riser
12" H x 20" W
(Sold separately)



Baffle and Filter
Customizable to create 2-3 chambers

