

STIEBEL ELTRON

TANKLESS WATER HEATERS



STIEBEL ELTRON

TANKLESS WATER HEATERS

Superior water heating

All Stiebel Eltron water heaters are manufactured in Germany. Each unit is individually tested for performance before it leaves our factory. Stiebel Eltron heaters the most advanced electric tankless technology, impressive energy saving performance, and incredible reliability.



Savings up to 20%

Compared to storage tanks, Stiebel Eltron tankless heaters save up to 20% on electricity.



No ventilation required

Unlike gas units, DCE requires no ventilation, so it can be installed anywhere.



Saves space

Its compact size allows residents to regain several cubic meters in space that a tank heater requires.



Saves water

Due to its size and elegant design, these heaters can be installed near the point of use, greatly reducing water waste.



Advanced heating system

The advanced technical system, supplies hot water naturally with a rapid heating response time.



Unlimited hot water

DCE and Tempra heaters heat the water instantly, providing constant hot water without any interruption.



Easy installation

The compact design and flat back panel allows for an easy and attractive installation.



Earthquake proof

Not subject to building regulations for seismic activity, as is the case with tank heaters.



No Combustion or flame

The DCE uses electricity, a safe energy source. There is no gas, no flame, no need for ventilation.



Safety systems

Anti-scalding system and high temperature limit protection. With the addition of UL / ETL certification.



3 YEAR WARRANTY

STIEBEL ELTRON

TANKLESS WATER HEATERS

TANKLESS WATER HEATERS

DCE TREND

Features

Electronic temperature control

Triple AE3 security system

Low pressure function

Works as a reinforcement for other systems

Model	DCE 10 TREND			DCE 15 TREND		
Phase 60/50 Hz						
Voltage	208 V	220 V	240V	208V	220V	240V
Stage 1	Wattage	5.4 kW	6.0 kW	9.0 kW	10.0 kW	12.0 kW
	Amperage	25.8 A	27.3 A	43.3A	45.5 A	50.0A
Stage 2	Wattage	7.2 kW	8.0 kW	10.7 kW	12.0 kW	14.4 kW
	Amperage	34.4 A	36.4 A	51.6 A	54.5A	60.0A
Required circuit breaker ¹	40 A			60 A		
Wire size: ² AWG Copper	8			6		
Minimum water flow to activate unit	1.0 l/min(0.264 gpm)					
Weight	2.5kg(5.5lbs)					
Nominal water volume	0.277 l(0.07gal)					
Max. inlet water temp.	55°C(131 °F)					
Dimensions	W 217 mm (8 9/16 in.) x H 372 mm (14 5/8 in.) x D 109 mm (4 5/16 in.)					
Max. working pressure	1MPa(145psi)					
Water connections	½ in. NPT					



Intelligent Control

2i 2 SENSORS
ELECTRONIC REGULATION
OF TEMPERATURE

Efficiency/Comfort

●○○ / ●○○

Temperature Adjustment 50 °C Fixed

DCE PREMIUM

Features

Electronic temperature control

Triple AE3 security system

Low pressure function

Works as a reinforcement for other systems

Temperature selection knob

Multi functional LCD display

Advanced Flow Control™

2 Temperature memory buttons

Energy savings calculator

Model	DCE 10 PREMIUM			DCE 15 PREMIUM		
Phase 60/50 Hz	1					
Voltage	208 V	220 V	240V	208V	220V	240V
Stage 1	Wattage	5.4 kW	6.0 kW	7.2 kW	9.0 kW	10.0 kW 12.0 kW
	Amperage	25.8 A	27.3 A	30.0 A	43.3 A	45.5 A 50.0A
Stage 2	Wattage	7.2 kW	8.0 kW	9.6 kW	10.7 kW	12.0 kW 14.4 kW
	Amperage	34.4 A	36.4 A	40.0A	51.6 A	54.5 A 60.0A
Required circuit breaker ¹	40 A			60 A		
Wire size: ² AWG Copper	8			6		
Minimum water flow to activate unit	1.0 l/min(0.264 gpm)					
Weight	2.5kg(5.5lbs)					
Nominal water volume	0.277 l(0.07gal)					
Max. inlet water temp.	55°C(131 °F)					
Dimensions	W 217 mm (8 9/16 in.) x H 372 mm (14 5/8 in.) x D 109 mm (4 5/16 in.)					
Max. working pressure	1MPa(145psi)					
Water connections	½ in. NPT					



Intelligent Control

4i 4 SENSORS
ELECTRONIC REGULATION
OF TEMPERATURE

Efficiency/Comfort

●●● / ●●●

Temperature Adjustment 20-60 °C

Via LCD Display

STIEBEL ELTRON

TANKLESS WATER HEATERS

TANKLESS WATER HEATERS

TEMPRA TREND 20

Features

- Self Modulating Energy Technology
- Exclusive Advanced Flow Control
- No Venting Required
- Unlimited Hot water Supply

Model	TEMPRA TREND 20
Phase	Single 60/50 Hz
Voltage	208 V 240 V
Wattage	19.2kW 14.4 kW
Amperage	2 x 30 A 2 x 35 A
Required circuit breaker ¹	2 x 30 A 2 x 35 A
Wire size, ² AWG Copper	2 x 8/2
Minimum water flow to activate unit	1.9 L/min (0.5 gpm)
Weight	7.3kg (16.1lbs)
Nominal water volume	1.0 L (0.26 gal)
Max. inlet water temp.	55°C (131 °F)
Dimensions	W 420 mm (16 5/8 in.) x H 369 mm (14 1/2 in.) x D 117 mm (4 5/8 in.)
Min. working pressure	2 bar (30 psi)
Water connections	3/4in. NPT



TEMPRA TREND 20


Provides continuous hot water on demand	✓
Saves energy with auto-modulation	✓
Digital display for accurate temperature setting	✓
Solid copper heating chambers	✓
Smart microprocessor technology for steady temperature with variable flow	✓
Made in Germany	✓



Advanced Flow Control™

Advanced Flow Control™ in DCE Premium models automatically reduces the flow of water slightly if hot water demand is too great.

DCE Premium never delivers colder water than the set point, but always delivers water at the correct temperature.

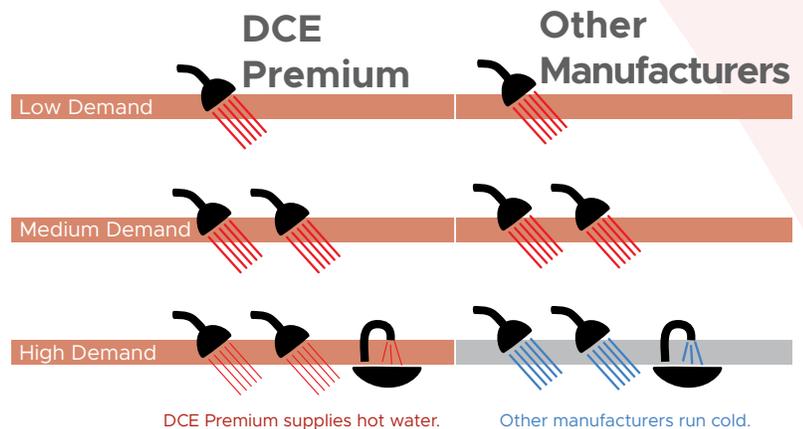

Stiebel Eltron has been the world leader in the development of advanced water heating and energy-saving technology since 1924. Our pursuit of engineering excellence and high-quality manufacturing results in products fulfilling the highest expectations of performance and reliability.

STIEBEL ELTRON

TANKLESS WATER HEATERS

IS SINGLE SHOWERHEAD WATERHEATER

5-in-1 chrome shower wand & accessories



Easy dial for precise control



External flow control w/filter



ELSD protection

- Attractive colorful design
- Anti-scald system w/thermostat & Automatic shut-off
- 5-in-1 chrome shower wand & accessories
- Maintenance-free copper heating system
- Works well with low water pressure

PREMIUM QUALITY
DESIGNED IN GERMANY

