

Distributed by:



🏠 27-29 Don Miguel Road Extension  
El Socorro Extension  
El Socorro 280616  
Trinidad & Tobago

📞 +1 (868) 674-TANK (8265)  
✉ info@rotoplastics.co.tt  
🌐 [www.rotoplastics.co.tt](http://www.rotoplastics.co.tt)



17 West Street  
West Hatfield, MA 01088 USA  
Tel: USA +1 413.247.3380  
Fax: 413.247.3369  
Email: [info@aptankless.com](mailto:info@aptankless.com)  
[www.aptankless.com](http://www.aptankless.com)

#503 - 8.2016



THE POWER OF GERMAN ENGINEERING

## DH Series Tankless Electric Water Heaters




- 🌊 Major energy savings
- 🌊 Unlimited supply of hot water
- 🌊 Compact design saves space

## DH Tankless Electric Water Heaters

Aqua Power® DH tankless electric water heaters are ideal for the following reasons:

- Heat water instantly and only when it is needed. DH units are highly efficient and help reduce electricity consumption in your home or apartment.
- Modern design saves valuable space in your home. A DH occupies minimal space and is installed mounted on the wall.
- Reliable and internationally recognized as a product of the latest advanced technology.

German design and engineering, factory warranty, and a tradition of excellence are the winning combination that ensures lasting reliability for many years.

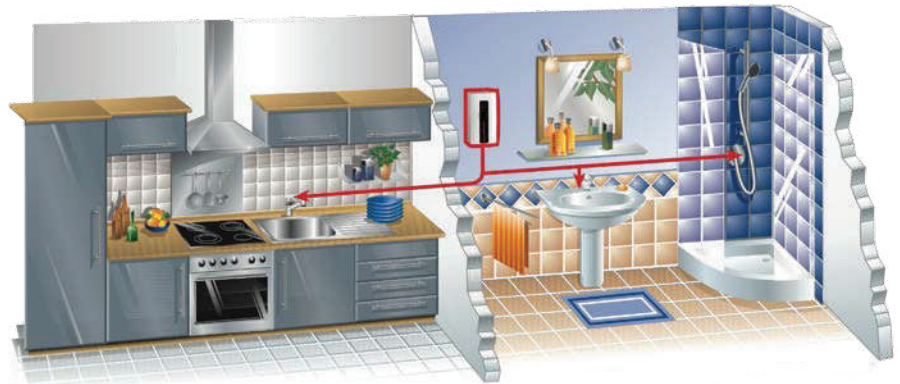

Homes Apartments Comercial Applications



### Technical Data

ISO 9001  
CERTIFIED



Specifications subject to change without notice.  
Our goal is to always provide the most advanced technology.

Model <sup>1</sup>	DH 100
Item No.	234029
Design	Pressure type
Current	Single phase - 60/50 Hz
220 V	8.4 KW/38 A
230 V	9.2 KW/40 A
240 V	10.0 KW/42 A
Circuit breaker size <sup>2</sup>	50 A
Wire gauge <sup>3</sup> Copper	6
Minimum flow rate to activate unit	0.92 gpm / 3.5 l/min
Max. working pressure	150 psi / 10 bar
Nominal water volume	0.13 gal / 0.5 l
Weight	4.4 lb / 2.0 kg
Dimensions	13¾" H x 7¼" W x 3¾" D
Plumbing connections	G ½"



<sup>1</sup> Suitable for supply with cold water.

<sup>2</sup> Unit is only activated when a hot water tap is opened.

<sup>3</sup> Conductors should be sized to maintain a voltage drop of less than 3% under load.

\* Only certain models